



THE CITY OF FIRCREST

115 RAMSDELL STREET • FIRCREST, WA 98466-6999 • (253) 564-8901 • www.cityoffircrest.net

The City of Fircrest is taking sealed bids for a 1998 International D/EX Bucket Truck

\$30,500 MINIMUM BID

Make: International

Year: 1998

Miles: 16359.1

Hours: 3879.3

Accessories

- Automatic Transmission
- Air Breaks
- Air ride drivers seat
- Multiple tool boxes and storage compartments
- Tag line on boom
- 55' Boom (recently passed dielectric testing)
- Ladder storage compartment

BIDDING INSTRUCTIONS

- Sealed bids are due by 12:00 P.M. Monday, March 11th, 2024 at City Hall, 115 Ramsdell Street, Fircrest WA 98466
- Minimum bid \$30,500
- The bid must be in a sealed envelope with **1998 International Bucket Truck** on the outside of the envelope
- Bid must include name, phone number, and bid amount
- Bids will be time and date stamped upon receipt
- If there is a tie on the winning bid, the time and date received will be used to determine which bid was received first and they will be declared the winner
- The winning bidder will be notified on 3/11/2024
- Cash or cashier's check required for the title change
- All taxes and fees are the winning bidder's responsibility

The vehicle is located at the City of Fircrest Public Works Yard.

For additional information or to schedule an inspection

Contact Jeff Davis at 253-625-3100 M-F 7:00-3:30 or email Jdavis@cityoffircrest.net







HANDS CLEAR
PERSONAL INJURY.

H23451

SIMON-TELELECT HI-RANGER OM SERIES

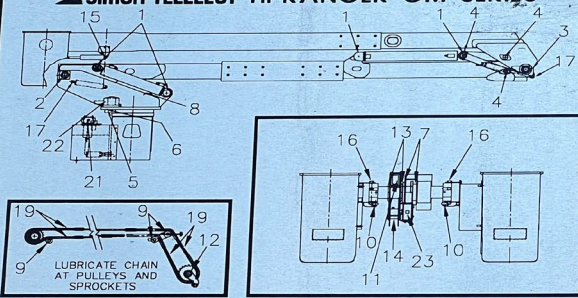

| ITEM | LUBRICATION POINT | QTY | LEC | TYPE OF LUBRICATION | METHOD OF APPLICATION |
|------|-----------------------------------|-----|-----|--|-----------------------|
| 1 | CYLINDER BEARING | 8 | | | |
| 2 | BOOM PIVOT BEARING | 2 | | | |
| 3 | ELBOW PIVOT BEARING | 2 | | | |
| 4 | LINK BEARING | 6 | | | |
| 5 | ROTATION GEAR TEETH | A/R | | | |
| 6 | ROTATION DRIVE BEARING | 2 | | | |
| 7 | BASKET SHAFT BEARING | 2 | Δ | MOBILGRASE® HP | GREASE GUN |
| **8 | ROTATION BEARING | 1 | | | |
| 9 | CHAIN PULLEYS | 7 | | | |
| 10 | BASKET ROTATOR CYLINDER | 4 | | | |
| 11 | JIB SHEAVES | 2 | | | |
| 12 | LEVELING SPROCKET | 2 | | | |
| **13 | WINCH PIVOT BEARINGS | 2 | | | |
| 14 | WINCH DRUM BEARINGS | 2 | | | |
| 15 | JIB CYLINDER PIN | 2 | | | |
| 16 | BASKET ROTATION PIVOT | 4 | | | |
| 17 | BASKET LEVELING CYLINDER BEARINGS | 4 | | | |
| 18 | VALVE LINKAGE | A/R | Δ | LPS-3 OR EQUIV. | SPRAY CAN |
| 19 | CHAINS | A/R | Δ | | |
| 20 | | | | | |
| **21 | HYDRAULIC TANK | 1 | □ | **MOBIL DTE® 11M | |
| 22 | ROTATION SPEED REDUCER | 1 | Δ | MOBILUX® EP023 | FILL IF LOW |
| **23 | WINCH SPEED REDUCER | 1 | Δ | MOBILURE® HD00-140 | |
| 24 | RETURN LINE FILTER | 1 | | REPLACE CARTRIDGE EVERY 250 HOURS OF OPERATION | |



LUBRICATION LEGEND
 □ CHECK DAILY
 Δ EVERY 90 DAYS OF OPERATION
 USE THE ABOVE MOBIL® PRODUCTS OR EQUIVALENT
 *DRAIN AND REFILL WHEN CONTAMINATED
 **LUBRICATE SPARINGLY EVERY 1/8 REVOLUTION
 ***FOR COLD WEATHER APPLICATIONS
 USE MOBIL® AERO HFA.
 NOTE: ALWAYS REBURE IF DISASSEMBLED

445944A

| | | | |
|--|-------------|--|----------------|
| NAME & MODEL HI-RANGER 57 OM | | DESIGN VOLTAGE 500-KVAC | |
| SER. NO. 57 OM-1973 FEE | | QUALIFICATION VOLTAGE 46-KVAC | |
| PLATFORM HEIGHT 57-FT | | DATE OF TEST 7-14-97 | |
| LBS. PER BUCKET (OR PLATFORM) 600 | | UNIT EQUIPPED WITH PLATFORMS 1 | |
| CATEGORY C | | TOTAL LBS. BOTH BUCKETS (OR PLATFORMS) 600 | |
| AERIAL DEVICES ONLY <input type="checkbox"/> | | UNIT EQUIPPED WITH MATERIAL HANDLING ATTACHMENT <input checked="" type="checkbox"/> | |
| CAPACITY RATING SEE LOAD CHART PLATE(S) FOR SPECIFIC CONFIGURATION CAPACITIES UNIT MUST BE OPERATED ON A FIRM AND LEVEL SURFACE WITH THE OUTRIGGERS, WHEN SO EQUIPPED, EXTENDED DOWN TO A SOLID FOOTING USE OUTRIGGER PADS. | | | |
| MAXIMUM HYDRAULIC PRESSURE (PSI) | | CYLINDER | PART NUMBER |
| DERICK | 3000 | MAIN JACK | 429362 |
| LIFT | 3000 | AUX. JACK | 429362 |
| DIGGER | NA | BOOM LIFT | 424859G |
| WINCH | NA | SECOND EXT | |
| *For settings other than above, consult manual or manufacturer for information. | | THIRD EXT | |
| MAXIMUM PNEUMATIC PRESSURE (PSI) | | ELBOW | 442146B |
| ELECTRICAL SYSTEM VOLTAGE 12V | | UPPER HYD LIFT | |
| | | LOWER HYD LIFT | |
| <p>WARNING: BEFORE OPERATING UNIT, READ AND UNDERSTAND ALL OPERATING AND SAFETY INFORMATION IN MANUAL AND ALL INFORMATION ON THIS PLACARD.</p> <p>General Instructions:</p> <ol style="list-style-type: none"> Lubricate unit per lubrication chart. Check unit for visible defects or loose objects. Check insulated boom and other insulating material for cleanliness. Check all decals for legibility. Replace if necessary. Start engine or engage power take off (PTO). Set vehicle park brake securely before operation. Extend hydraulic outriggers to a solid footing. Operate all hydraulic controls slowly and deliberately for smooth bucket or platform functions. <p>ATTENTION</p> <ol style="list-style-type: none"> Do not alter components without written approval from the manufacturer. All updates in effect, both the manufacturer as well as ANSI/OSHA, at the time of rebuild should be performed. If unit is remounted by entity other than a Simon-Telelect distributor, Simon-Telelect must be contacted to ensure that rebuilding is completed to specifications. If unit is resold, Simon-Telelect must be notified in writing of new owner and what steps were taken to instruct the new owner as to the operation and maintenance of the unit. Copies of Simon-Telelect operators and maintenance manuals must accompany the unit at the time of sale. <p>Copies of maintenance and inspection records must accompany unit at the time of sale. All updates by Simon-Telelect must be completed at the time of sale.</p> | | | |
| (TO BE COMPLETED BY INSTALLER) | | | |
| THIS UNIT WAS INSTALLED BY: | | 7012-10 | |
| | | 400 Oakwood Road PO Box 180 Watertown, South Dakota 57201 USA | |
| | | 16453 P | |

HI-RANGER OM JIB CAPACITIES

SINGLE TWO-MAN BASKET

LOAD RADIUS FROM BASKET SHAFT

| UPPER BOOM ANGLE | LOAD RADIUS FROM BASKET SHAFT | | | | |
|------------------|-------------------------------|-----------|------------|------------|----------|
| | 0 IN. | UP TO 2FT | 2FT TO 4FT | 4FT TO 6FT | OVER 6FT |
| -60° | 2150 | 1900 | 1350 | 900 | 675 |
| -30° | 1550 | 1300 | 1150 | 900 | 675 |
| 0° | 1350 | 1150 | 1000 | 900 | 675 |
| +30° | 1550 | 1300 | 1150 | 900 | 675 |
| +60° | 2150 | 1900 | 1350 | 900 | 675 |
| +90° | 2250 | 2000 | 1350 | 900 | 675 |
| +120° | 1100 | 1000 | 925 | 875 | 675 |
| +150° | 700 | 625 | 600 | 575 | 550 |
| +180° | 650 | 600 | 575 | 550 | 525 |
| MAX | 700 | 575 | 525 | 475 | 450 |

NOTE: DEDUCT THE WEIGHT OF MEN, TOOLS, AND LINER FROM ALL CAPACITIES SHOWN.

WARNING: IF AERIAL DEVICE IS MODIFIED IN ANY WAY OR REMOUNTED, TEREX TELELECT MUST BE NOTIFIED AS CAPACITIES GIVEN MAY BE AFFECTED. WINCH CAPACITY, 2000 LBS

TEREX TELELECT

HEAVY DUTY
444162